




Model Number: **MMP TM57-24V GP52-2076**  
 Date: 24 August, 2011 Prepared for: Production

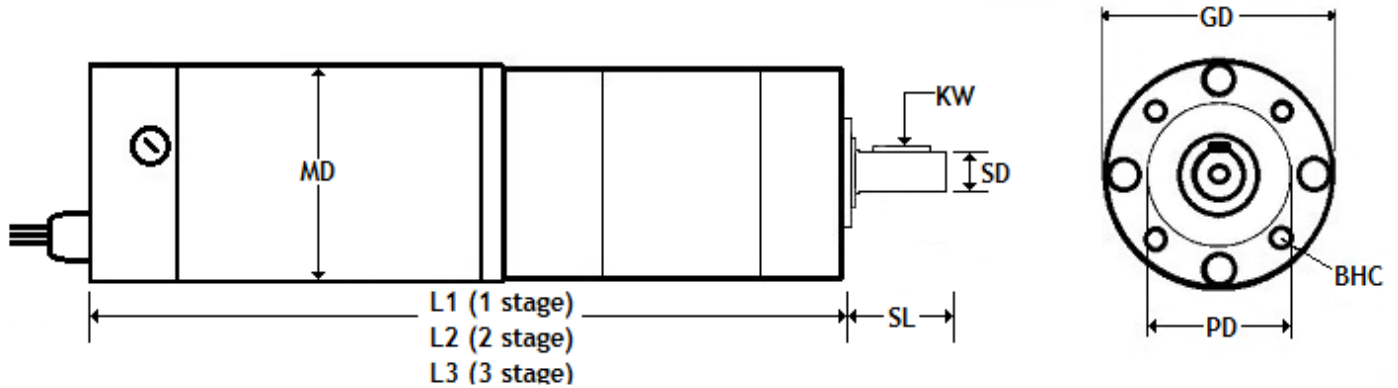

**Note:** Shielded, Jacketed Leadwires, 12" Long, exit the Rear End Cap through a "Seal-Tight" Connector

**DIMENSIONS:** (Note: Center of output shaft contains an M-4 threaded hole)  
 MD = 2.25" (57mm) SL = 25mm (usable shaft length = 21mm)  
 L4 = 8.35" (212mm) GD = 2.047 (52mm)  
 KW = 2H x 4W x 16 mm long PD = 32mm, pilot length = 3mm  
 SD = 12mm BHC (dia) = M5 x 10mm deep (4 ea) on a 40mmØ BC

DC MOTOR PERFORMANCE PARAMETERS:	VALUE	UNITS	TOLERANCE
Rated DC Voltage	24.0	DC VOLTS	-----
Rated Continuous Current	3.8	AMPERES	-----
No-Load Speed	5000	RPM	MAX
Rated Speed	4400	RPM	+/- 15%
Rated Continuous Power out	81	WATTS	+/- 15%
Rated Continuous Torque	25.0	OZ-IN	-----
Peak Torque (motor only)	130	OZ-IN	-----
No-Load Current	0.62	AMPERES	MAX
Back EMF Constant (Ke)	4.8	V/KRPM	+/- 10%
Torque Constant (Kt)	6.5	OZ-IN/AMP	+/- 10%
DC Armature Resistance (@1.5 amps)	0.4	OHMS	+/- 15%
Armature temperature	155	DEG. C	MAX
PLANETARY GEARMOTOR OUTPUT PARAMETERS:	VALUE	UNITS	TOLERANCE
Gearhead Ratio (exact)	2075.94: 1		
Gearmotor Rated Continuous Torque	443	IN-LBS	MAX
Gearmotor Rated Peak Torque	443++	IN-LBS	MAX
Gearhead Shaft Output Speed (at full-load)	2	RPM	-----
Gearhead Standard Backlash	51	ARC MINUTES	MAX
Gearhead Efficiency	65%	-----	-----
Gearmotor Total Weight	80	OZ	MAX

**++ All Peak Torque Values are dependent upon duty. Kindly consult our Sales Offices for details.**

THIS ROBUST, TENV DESIGN WITH 'TRUE PLANETARY GEARING' IS OFFERED BY:

**MIDWEST MOTION PRODUCTS**

*Design, Manufacturing & Distribution - Motion Control Equipment*

10761 Ahern Avenue SW Watertown, MN 55388

Phone: 952-955-2626

Fax: 480-247-4096

[www.midwestmotion.com](http://www.midwestmotion.com)

email: [sales@midwestmotion.com](mailto:sales@midwestmotion.com)