




REVERSIBLE BRUSHED
DC MOTOR

Model Number:

MMP TM57-12V

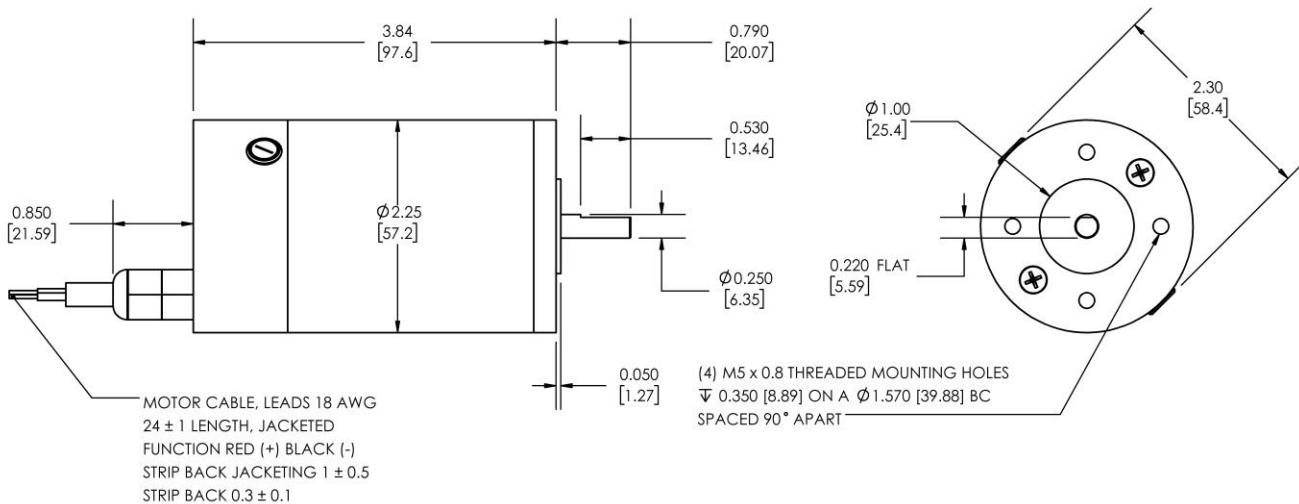

DIMENSIONS ARE INCHES [MM] UNLESS OTHERWISE STATED

DC MOTOR PERFORMANCE PARAMETERS:	VALUE	UNITS	TOLERANCE
Rated DC Voltage	12	DC VOLTS	-----
Rated Continuous Current	9.9	AMPERES	-----
No-Load Speed	5000	RPM	MAX
Rated Speed	3488	RPM	+/- 15%
Rated Continuous Power Out	73	WATTS	+/- 15%
Rated Continuous Torque	28	OZ-IN	-----
Peak Torque (motor only)	71	OZ-IN	-----
No-Load Current	1.26	AMPERES	MAX
Back EMF Constant (Ke)	2.4	V/KRPM	+/- 10%
Torque Constant (Kt)	3.2	OZ-IN/AMP	+/- 10%
DC Armature Resistance	0.36	OHMS	+/- 15%
Armature Inductance	0.36	mH	+/- 15%
Armature temperature	155	DEG. C	MAX

NOTES:

- NEMA MOUNTING FLANGE OPTION AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)

MIDWEST MOTION PRODUCTS, INC

DESIGN, MANUFACTURING & DISTRIBUTION - MOTION CONTROL EQUIPMENT

www.midwestmotion.com email: sales@midwestmotion.com