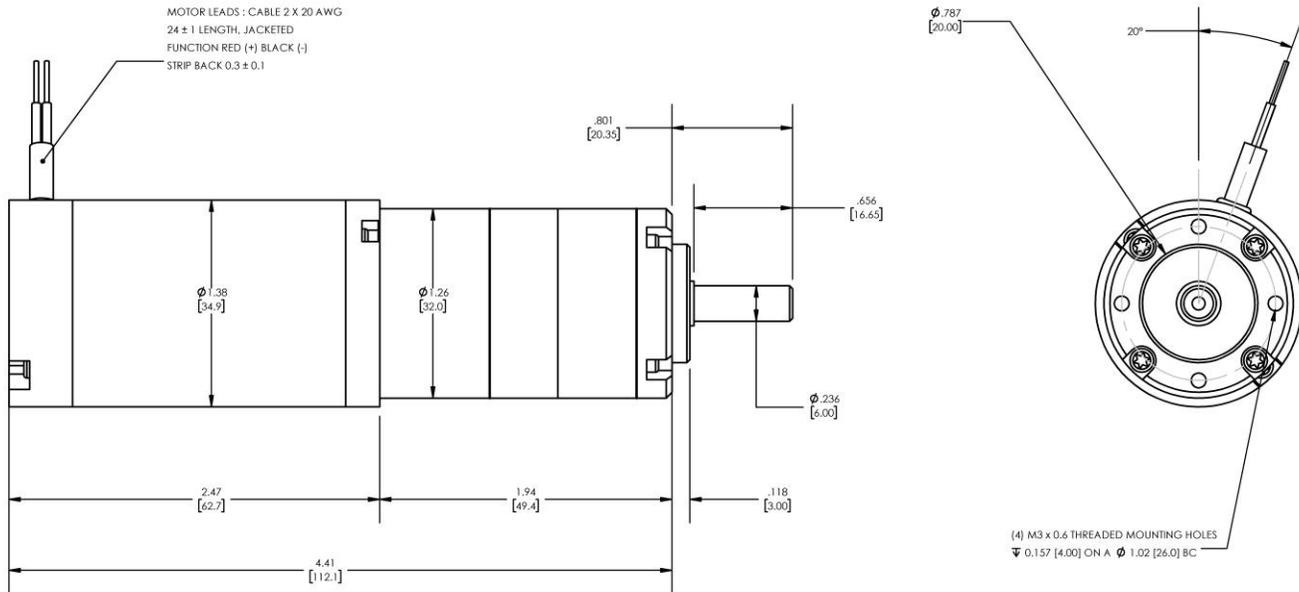


**Model Number:**
**MMP S14-247C-12V GP32-025**


DIMENSIONS ARE INCHES [MM] UNLESS OTHERWISE STATED

PLANETARY GEARMOTOR OUTPUT PARAMETERS:	VALUE	UNITS	TOLERANCE
Gearhead Ratio (exact)	25.01 : 1		
Gearhead Shaft Output Speed (at full-load)	187	RPM	MAX
Gearmotor Rated Continuous Torque	6.0	In-Lbs	MAX
Gearmotor Rated Peak Torque	<b>19++</b>	In-Lbs	----
Gearhead Standard Backlash	93	Arc Minutes	MAX
Gearhead Efficiency	75%	----	----
Output Shaft Radial Load Capacity	16	Lbs	MAX
Output Shaft Axial Load Capacity	5	Lbs	MAX
Gearmotor Total Weight	1.1	Lbs	MAX

++ All Peak Torque values are dependent upon duty. Contact our sales office for details.

DC MOTOR PERFORMANCE PARAMETERS:	VALUE	UNITS	TOLERANCE
Rated DC Voltage	12	DC VOLTS	----
Rated Continuous Current	3.02	AMPERES	----
No-Load Speed	6667	RPM	MAX
Rated Speed	4678	RPM	+/- 15%
Rated Continuous Power Out	18	WATTS	+/- 15%
Rated Continuous Torque	5.1	OZ-IN	----
Peak Torque (motor only)	16	OZ-IN	----
No-Load Current	0.88	AMPERES	MAX
Back EMF Constant (Ke)	1.8	V/KRPM	+/- 10%
Torque Constant (Kt)	2.4	OZ-IN/AMP	+/- 10%
DC Armature Resistance	1.19	OHMS	+/- 15%
Armature Inductance	0.10	mH	+/- 15%
Armature temperature	155	DEG. C	MAX

## NOTES:

- ENCODER & BRAKE OPTIONS AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)
- NEMA MOUNTING FLANGE OPTION AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)

**MIDWEST MOTION PRODUCTS**
**DESIGN, MANUFACTURING & DISTRIBUTION - MOTION CONTROL EQUIPMENT**
[www.midwestmotion.com](http://www.midwestmotion.com)

 email: [sales@midwestmotion.com](mailto:sales@midwestmotion.com)