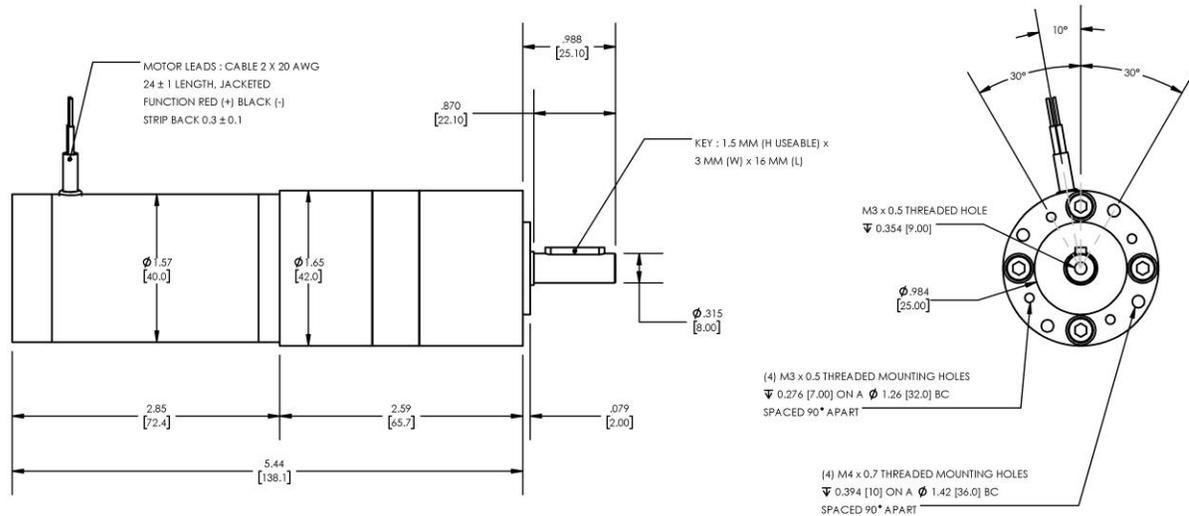


**Model Number:**
**MMP TM40-285F-48V GP42-03.7**


DIMENSIONS ARE INCHES [MM] UNLESS OTHERWISE STATED

PLANETARY GEARMOTOR OUTPUT PARAMETERS:	VALUE	UNITS	TOLERANCE
Gearhead Ratio (exact)	3.70 : 1		
Gearhead Shaft Output Speed (at full-load)	1098	RPM	MAX
Gearmotor Rated Continuous Torque	1.3	In-Lbs	MAX
Gearmotor Rated Peak Torque	<b>3.1++</b>	In-Lbs	----
Gearhead Standard Backlash	54	Arc Minutes	MAX
Gearhead Efficiency	80%	----	----
Output Shaft Radial Load Capacity	36	Lbs	MAX
Output Shaft Axial Load Capacity	12	Lbs	MAX
Gearmotor Total Weight	1.3	Lbs	MAX

**++ All Peak Torque values are dependent upon duty. Contact our sales office for details.**

DC MOTOR PERFORMANCE PARAMETERS:	VALUE	UNITS	TOLERANCE
Rated DC Voltage	48	DC VOLTS	----
Rated Continuous Current	0.77	AMPERES	----
No-Load Speed	6076	RPM	MAX
Rated Speed	4064	RPM	+/- 15%
Rated Continuous Power Out	21	WATTS	+/- 15%
Rated Continuous Torque	7.0	OZ-IN	----
Peak Torque (motor only)	17	OZ-IN	----
No-Load Current	0.11	AMPERES	MAX
Back EMF Constant (Ke)	7.9	V/KRPM	+/- 10%
Torque Constant (Kt)	10.7	OZ-IN/AMP	+/- 10%
DC Armature Resistance	20.59	OHMS	+/- 15%
Armature Inductance	9.74	mH	+/- 15%
Armature temperature	155	DEG. C	MAX

**NOTES:**

- ENCODER & BRAKE OPTIONS AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)
- NEMA MOUNTING FLANGE OPTION AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)

# MIDWEST MOTION PRODUCTS, INC

## DESIGN, MANUFACTURING & DISTRIBUTION - MOTION CONTROL EQUIPMENT

[www.midwestmotion.com](http://www.midwestmotion.com)

email: [sales@midwestmotion.com](mailto:sales@midwestmotion.com)