





MMP LA3-24V-10-A-250

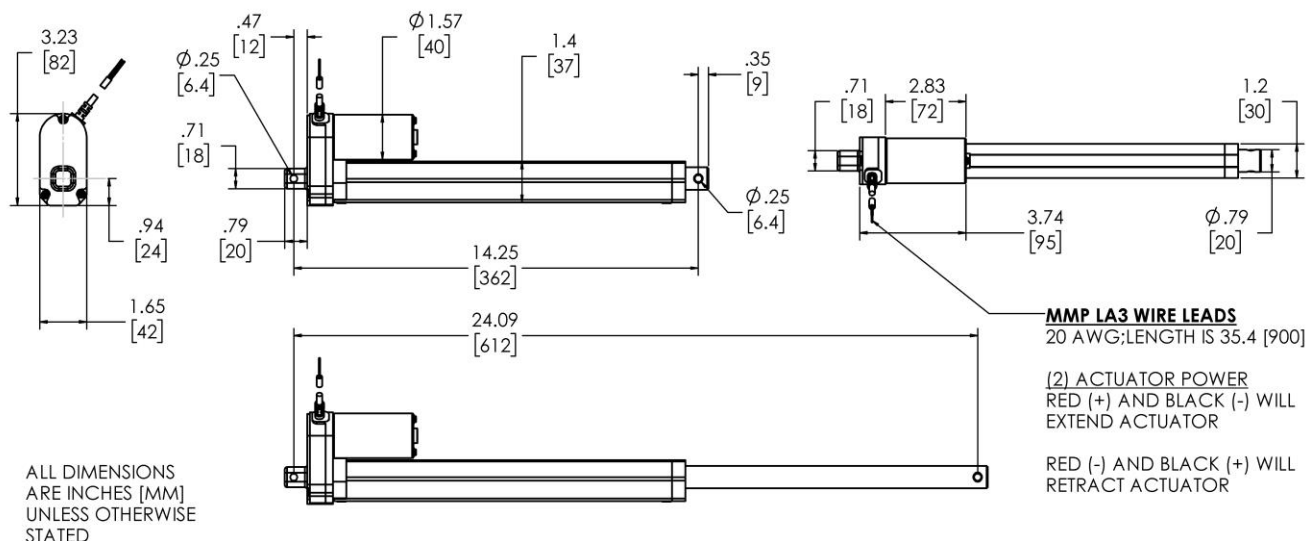

Performance Parameters	Value	Units	Tolerance
Rated DC Voltage	24	VDC	----
Gear Ratio	10:1	----	----
Rated Force Capacity	56 (250)	LBS (N)	MAX
Rated Current (at rated force capacity)	1.6	AMPERES	MAX
Rated Stroke Speed (at rated force capacity)	0.93 (23.6)	IN/SEC (MM/SEC)	± 10%
Stroke Speed at No-Load	1.09 (27.7)	IN/SEC (MM/SEC)	± 10%
Static Load Capacity	562 (2500)	LBS (N)	MAX
Maximum Recommended Duty	25%	----	MAX
Minimum Ambient Operating Temperature Range	-13 (-25)	°F (C)	MIN
Maximum Ambient Operating Temperature Range	149 (65)	°F (C)	MAX

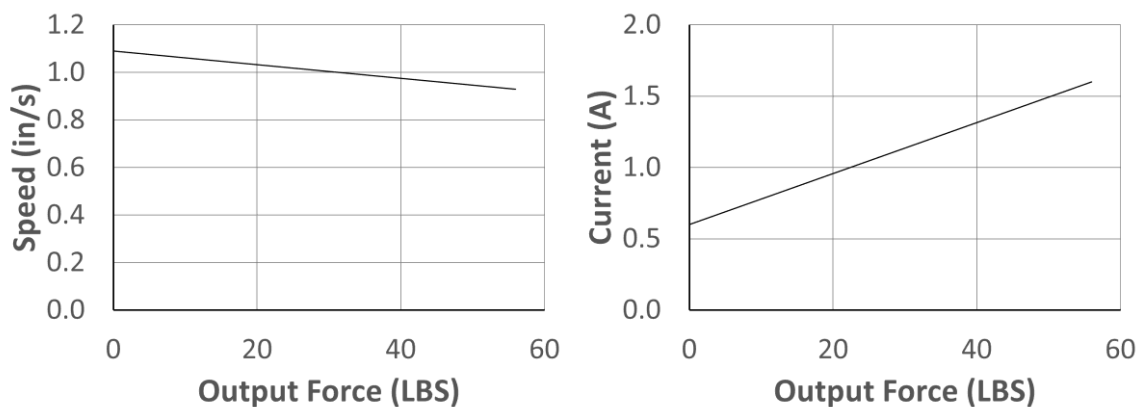

email: sales@midwestmotion.com