


Model Number:

MMP BL86-425E-36V GRA81-130

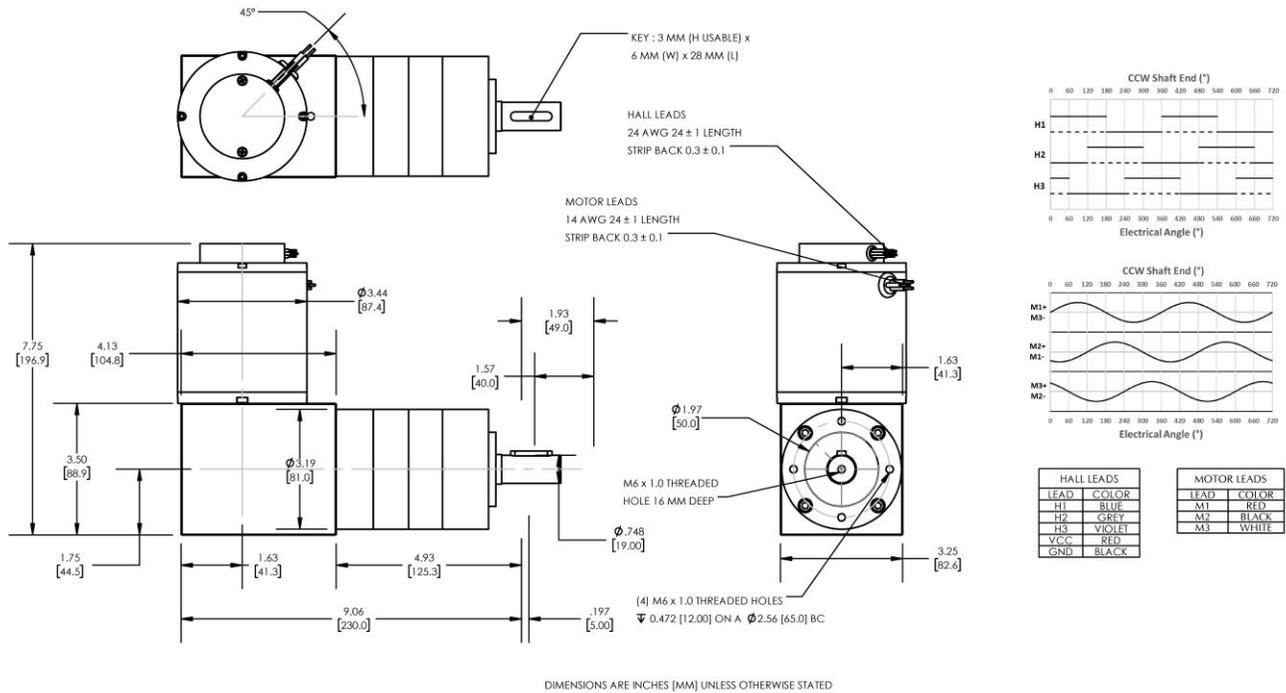

| PLANETARY GEARMOTOR OUTPUT PARAMETERS: | VALUE | UNITS | TOLERANCE |
|--|------------|-------------|-----------|
| Gearhead Ratio (exact) | 129.62 : 1 | | |
| Gearhead Shaft Output Speed (at full-load) | 34 | RPM | MAX |
| Gearmotor Rated Continuous Torque | 856 | In-Lbs | MAX |
| Gearmotor Rated Peak Torque | 2124++ | In-Lbs | ---- |
| Gearhead Standard Backlash | 36 | Arc Minutes | MAX |
| Gearhead Efficiency | 70% | ---- | ---- |
| Output Shaft Radial Load Capacity | 225 | Lbs | MAX |
| Output Shaft Axial Load Capacity | 45 | Lbs | MAX |
| Gearmotor Total Weight | 15 | Lbs | MAX |

++ All Peak Torque values are dependent upon duty. Contact our sales office for details.

| DC MOTOR PERFORMANCE PARAMETERS: | VALUE | UNITS | TOLERANCE |
|----------------------------------|-------|-----------|-----------|
| Rated DC Voltage | 36 | DC VOLTS | ---- |
| Rated Continuous Current | 19.4 | AMPERES | ---- |
| No-Load Speed | 5902 | RPM | MAX |
| Rated Speed | 4385 | RPM | +/- 15% |
| Rated Continuous Power Out | 490 | WATTS | +/- 15% |
| Rated Continuous Torque | 151 | OZ-IN | ---- |
| Peak Torque (motor only) | 416 | OZ-IN | ---- |
| No-Load Current | 1.09 | AMPERES | MAX |
| Back EMF Constant (Ke) | 6.1 | V/KRPM | +/- 10% |
| Torque Constant (Kt) | 8.2 | OZ-IN/AMP | +/- 10% |
| DC Armature Resistance | 0.48 | OHMS | +/- 15% |
| Armature Inductance | 0.43 | mH | +/- 15% |
| Armature temperature | 155 | DEG. C | MAX |

NOTES:

- ENCODER & BRAKE OPTIONS AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)
- NEMA MOUNTING FLANGE OPTION AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)