


**Model Number:**  
**MMP S40-775C-12V GP105-025**

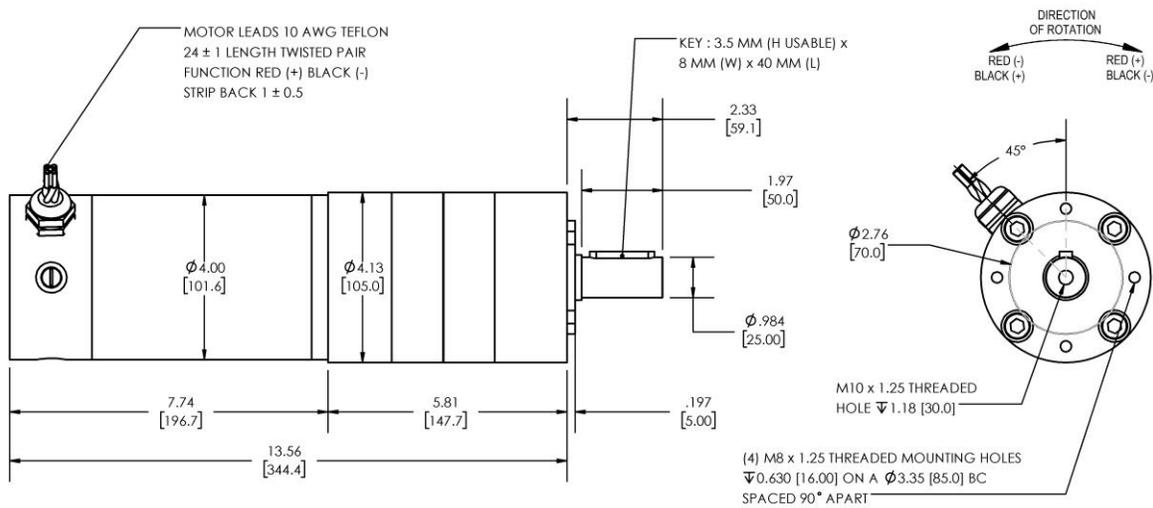

DIMENSIONS ARE INCHES [MM] UNLESS OTHERWISE STATED

PLANETARY GEARMOTOR OUTPUT PARAMETERS:	VALUE	UNITS	TOLERANCE
Gearhead Ratio (exact)	25.01 : 1		
Gearmotor Output Speed (at Cont. Torque)	60	RPM	+/- 15%
Gearmotor Rated Continuous Torque	293	In-Lbs	MAX
Gearmotor Peak Torque Capacity	<b>980++</b>	In-Lbs	MAX
Gearhead Standard Backlash	36	Arc Minutes	MAX
Gearhead Efficiency	75%	----	----
Output Shaft Radial Load Capacity	203	Lbs	MAX
Output Shaft Axial Load Capacity	41	Lbs	MAX
Gearmotor Total Weight	14.5	Lbs	MAX

**++ All Peak Torque values are dependent upon duty. Contact our sales office for details.**

DC MOTOR PERFORMANCE PARAMETERS:	VALUE	UNITS	TOLERANCE
Input DC Voltage	12	DC VOLTS	----
No-Load Current	3.72	AMPERES	MAX
No-Load Speed	1707	RPM	+/- 15%
Rated Continuous Torque	250	OZ-IN	MAX
Rated Continuous Current	30.3	AMPERES	MAX
Rated Speed (at Cont. Torque)	1508	RPM	+/- 15%
Rated Continuous Power Out	279	WATTS	+/- 15%
Peak Motor Torque	836	OZ-IN	MAX
Peak Motor Current	92.6	AMPERES	MAX
Back EMF Constant (Ke)	6.9	V/KRPM	+/- 10%
Torque Constant (Kt)	9.4	OZ-IN/AMP	+/- 10%
DC Armature Resistance	0.06	OHMS	+/- 15%
Armature Inductance	0.06	mH	+/- 15%
Number of Motor Poles	4	(-)	----
Armature temperature	155	DEG. C	MAX

NOTES:

1. Rated speeds may drop as the motor temperature increases. Values are stated with the motor at 25 °C.
2. All Peak Torque values are dependent upon duty. Contact our sales office for details.

ENCODER & BRAKE OPTIONS AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)

NEMA MOUNTING FLANGE OPTION AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)

